



Pike F-145



- Versatile 1394b camera
- Advanced feature set
- Many variants
- High frame rates

Description

1394b camera with Sony ICX285 sensor – 30 fps

The Pike F-145B/C is equipped with one of the finest sensors, Sony's ExView HAD CCD ICX285. Furthermore, various real-time pre-processing functions enhance its exceptional image quality. At full resolution, it runs 30 fps. Higher frame rates can be reached by a smaller AOI, binning (b/w), or sub-sampling.

Options



- 1394b connectors: 2 x copper (daisy chain) or 1 x GOF, 1 x copper, Hirose power: out
- Various IR cut/pass filters, various lens mounts
- Angled head, white medical housing

Also available: **Pike F-145B/C (-15fps) version** - lower framerate, enhanced image quality

Specifications

Pike	F-145
Interface	IEEE 1394b - 800 Mb/s, 2 ports, daisy chain, fiber optic (GOF) optional
Resolution	1388 × 1038
Sensor	Sony ICX285
Sensor type	CCD Progressive
Cell size	6.45 µm
Lens mount	C-Mount
Max frame rate at full resolution	30 fps
ADC	14 bit
On-board FIFO	64 Mbyte

Pike	F-145
	Output
Bit depth	8-14 bit
Mono modes	Mono8, Mono12, Mono16
Color modes RGB	RGB8
Raw modes	Raw8, Raw12, Raw16
General purpose inputs/outputs (GPIOs)	
Opto-isolated I/Os	2 inputs, 4 outputs
RS-232	1
Operating conditions/dimensions	
Power requirements (DC)	8 V - 36 V
Power consumption (@12 V)	4 W
Mass	250 g
Body dimensions (L × W × H in mm)	96.8 × 44 × 44 mm including connectors, w/o tripod and lens
Regulations	CE, FCC Class B, RoHS

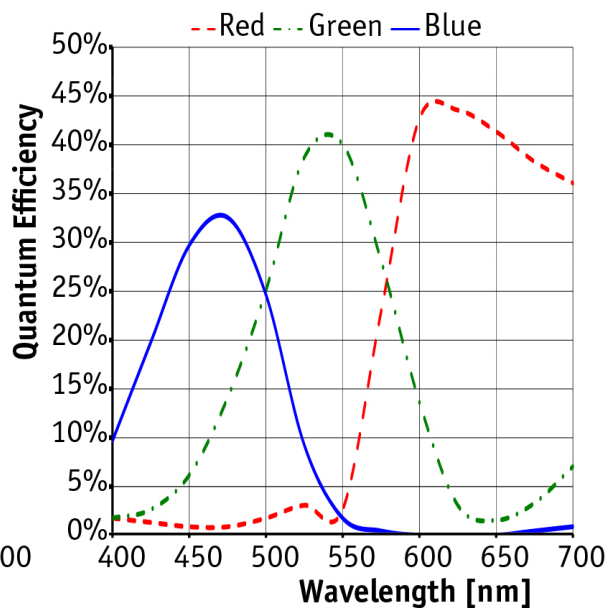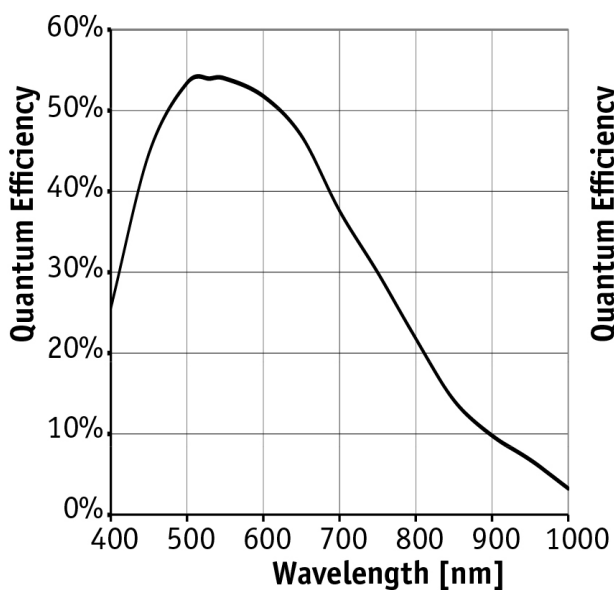


Features

- High SNR mode (up to 24 dB better signal-to-noise ratio)
- Low-Noise Binning Mode
- Smear reduction
- Shading correction
- ROI, separate ROI for auto features



- Binning
- Decimation
- Auto gain (manual gain control: 0 to 32 dB)
- Auto exposure (39 μ s to 67 s)
- Auto white balance
- LUT (look-up table)
- Hue, saturation, color correction
- Reverse X
- Deferred image transport
- Trigger programmable, level, single, bulk, programmable delay
- Sequence mode (changes the camera settings on the fly)
- SIS (secure image signature, time stamp for trigger, frame count etc.)
- Storable user sets

Technical drawing

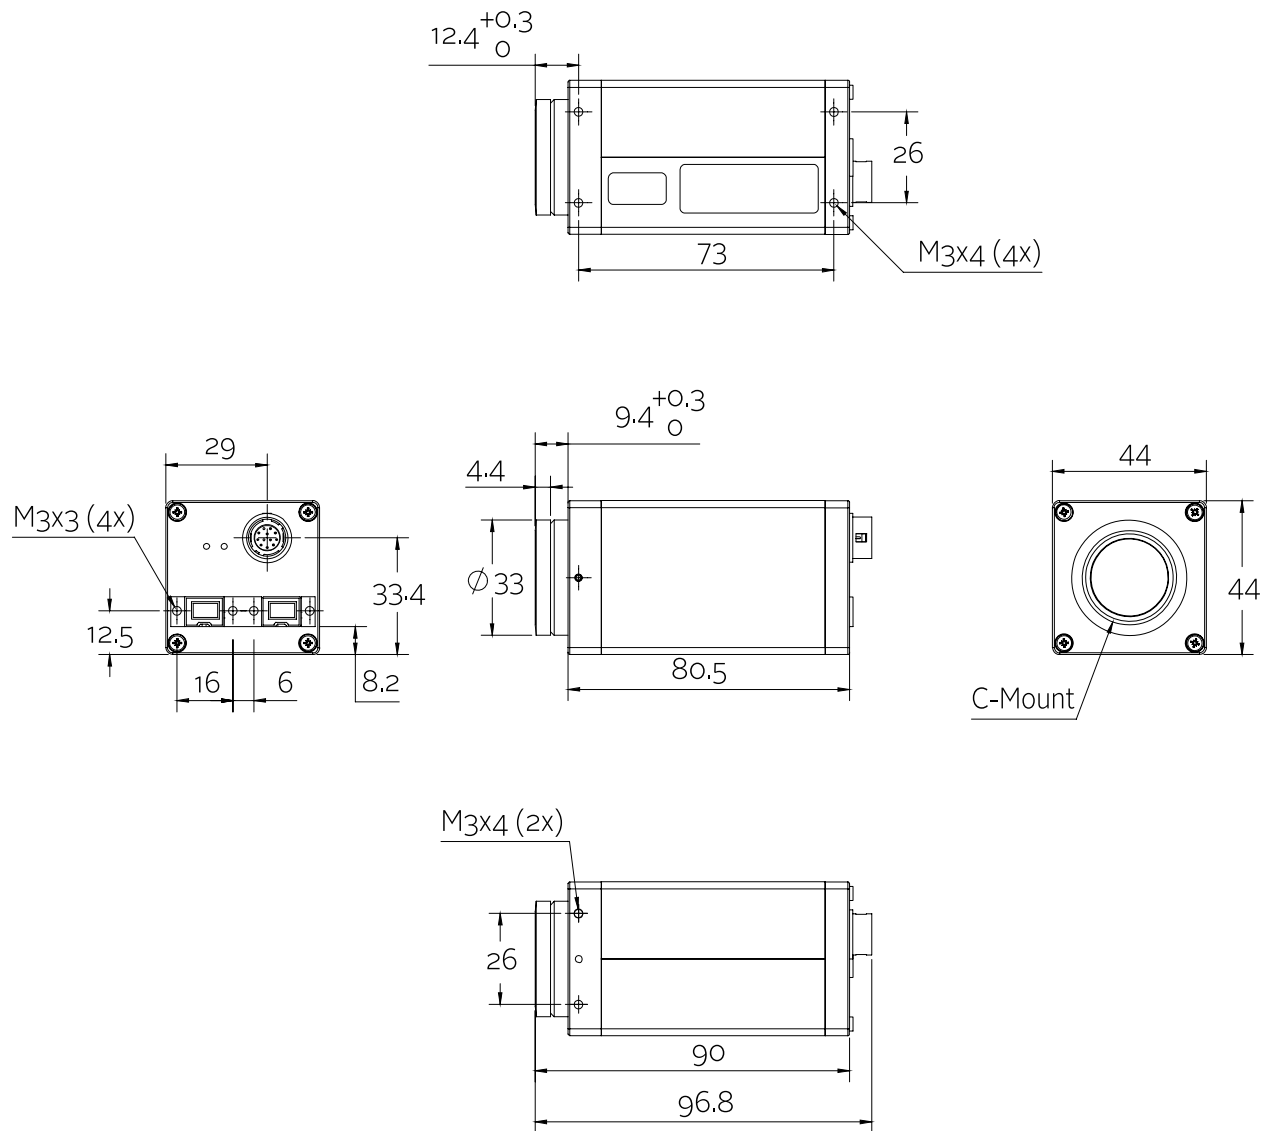



Applications

The well-engineered sensor Sony ICX285 in combination with the diverse image pre-processing functions and the modular design of the Pike F-145B/C result in a camera with an exceptional high performance. It is the perfect choice for sophisticated applications, especially with low light.

The Pike F-145B/C is especially suited for:

- Applications which require the highest image quality even with low light
- OEM applications (modular concept)
- Motion studies
- 3D recordings of still and moving objects
- Science and research
- Healthcare and sports
- Multimedia and entertainment
- ITS (Intelligent traffic solutions)
- Long cable lengths, 400 meters and more (fiber version)