



- 30 fps @ 1.4 Megapixel
- Rugged housing
- Video-type auto iris



Description

High sensitivity 1.4 Megapixel CCD camera - 30 fps

Prosilica GC1380H and its color counterpart, GC1380CH, are high-speed versions of the very popular GC1380. The ultra-compact GC1380H is a very sensitive, high-resolution CCD camera with Gigabit Ethernet interface (GigE Vision) that runs 30 frames per second at full resolution. Options


• IR cut filter, CS-Mount

Specifications

| Prosilica GC | 1380H |
|-----------------------------------|-----------------------------|
| Interface | IEEE 802.3 1000baseT |
| Resolution | 1360 × 1024 |
| Sensor | Sony ICX285 |
| Sensor type | CCD Progressive |
| Sensor size | Type 2/3 |
| Cell size | 6.45 μm |
| Lens mount | C (adjustable) |
| Max frame rate at full resolution | 30 fps |
| ADC | 12 bit |
| On-board FIFO | 16 Mbyte |
| Output | |
| Bit depth | 8/12 bit |
| Mono modes | Mono8, Mono12, Mono12Packed |
| Color modes RGB | RGB8Packed, BGR8Packed |



| Prosilica GC | 1380H |
|--|---|
| Raw modes | BayerRG8, BayerRG12, BayerGR12Packed |
| General purpose inputs/outputs (GPIOs) | |
| TTL I/Os | 1 input, 1 output |
| Opto-isolated I/Os | 1 input, 1 output |
| RS-232 | 1 |
| Operating conditions/dimensions | |
| Operating temperature | 0°C +50°C |
| Power requirements (DC) | 5-25 VDC* |
| Power consumption (@12 V) | 3.5 W |
| Mass | 111 g |
| Body dimensions (L × W × H in mm) | 59 × 46 × 33 including connectors, w/o tripod and lens |
| Regulations | CE, FCC Class A, RoHS (2011/65/EU) |

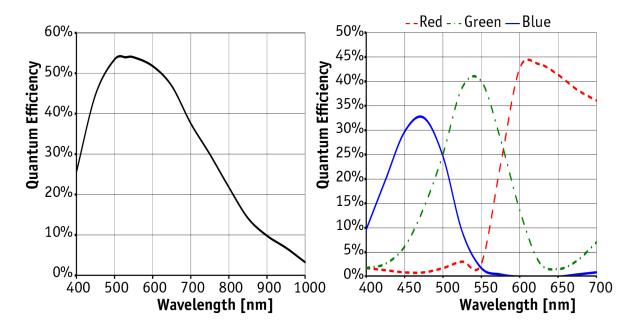

Features

Prosilica GC1380H features include:


- Video-type auto iris
- ROI, DSP subregion (selectable ROI for auto features)
- Binning
- Auto gain (manual gain control: 0 to 33 dB)
- Auto exposure (manual exposure controls: 10 μs to 78.5 s)




- Auto white balance
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Global shutter (digital shutter)
- Recorder and Multiframe acquisition modes
- Event channel
- Chunk data
- Storable user sets



Technical drawing

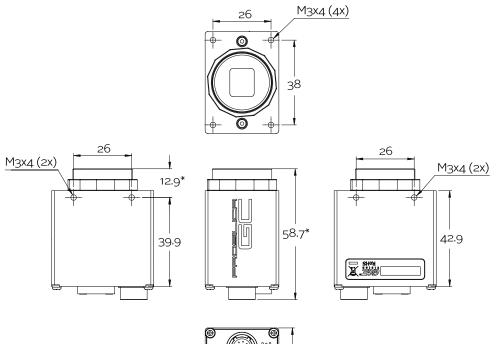



*Nominal value. Add 0.3 mm for color cameras.



Applications

Prosilica GC1380H is ideal for a wide range of applications including:

- Industrial inspection
- Machine vision
- Ophthalmology
- Microscopy
- Fluorescence
- Aeronautical and aerospace
- Public security
- Surveillance
- Traffic imaging