



Prosilica GS

1380

- Right-angle CCD camera with low height profile
- 30 fps @ 1.4 Megapixel
- Video-type auto iris
- Landscape or portrait sensor orientation

Description

1.4 Megapixel CCD camera with GigE Vision, High sensitivity

Prosilica GS1380 is a very sensitive, high-resolution CCD camera with Gigabit Ethernet interface. GS1380 incorporates the incomparable Sony ICX285 CCD sensor with EXview technology. GS1380 runs 30 frames per second at 1360 x 1024 resolution and is available in landscape or Portrait orientation.



Options

- IR cut filter, CS-Mount
- White medical housing

Specifications

Prosilica GS	1380
Interface	IEEE 802.3 1000baseT
Resolution	1360 × 1024
Sensor	Sony ICX285
Sensor type	CCD Progressive
Cell size	6.45 µm
Lens mount	C-Mount, CS-Mount
Max frame rate at full resolution	30 fps
ADC	14 bit
On-board FIFO	16 Mbyte
Output	
Bit depth	8/12 bit
Mono modes	Mono8, Mono12, Mono12Packed
Color modes RGB	RGB8Packed, BGR8Packed

Prosilica GS	1380
Raw modes	BayerRG8, BayerRG12, BayerGR12Packed
General purpose inputs/outputs (GPIOs)	
TTL I/Os	1 input, 1 output
Opto-isolated I/Os	1 input, 1 output
RS-232	1
Operating conditions/dimensions	
Operating temperature	0°C ... +50°C
Power requirements (DC)	5-25 VDC*
Power consumption (@12 V)	3.5W
Mass	187 g
Body dimensions (L × W × H in mm)	96 × 56 × 26 including connectors, w/o tripod and lens
Regulations	CE, FCC Class A, RoHS (2011/65/EU)

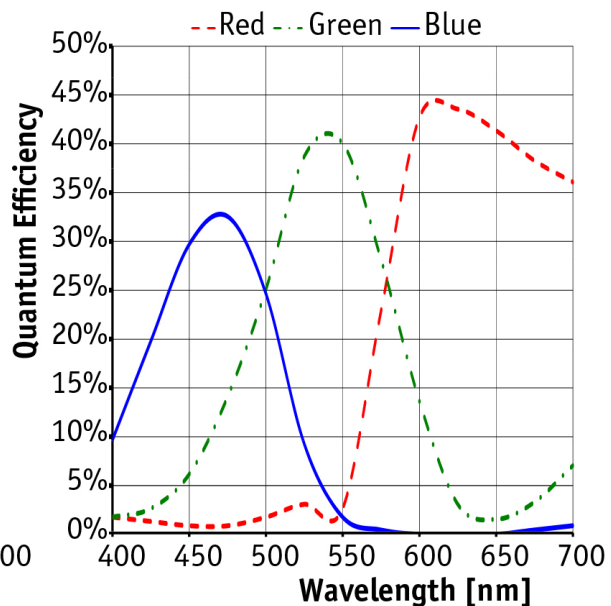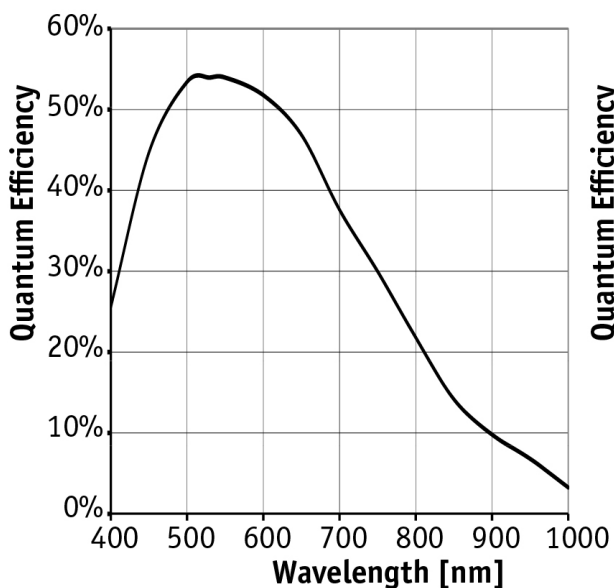

Features

Prosilica GS1380 features include:

- Video-type auto iris
- ROI, DSP subregion (selectable ROI for auto features)
- Binning
- Auto gain (manual gain control: 0 to 30 dB)
- Auto exposure (manual exposure controls: 10 µs to 78.5 s)



- Auto white balance
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Global shutter (digital shutter)
- Recorder and Multiframe acquisition modes
- Event channel
- Chunk data
- Storable user sets

Applications

Prosilica GS1380 is ideal for a wide range of applications including:

- Industrial inspection
- Machine vision
- Microscopy
- Ophthalmology
- Fluorescence
- Aeronautical and aerospace
- Public security
- Surveillance